


FLEX CONNECTOR SOLUTIONS INFORMATION

- Web links to product info including performance parameters, drawings, 3D models, etc.
 - www.fciconnect.com/flex
- Documentation
 - Connectors For Flexible Circuitry FFC/FPC/CIC catalog
 - Sample Booklet
 - Documentation available at www.fci.com or www.fciconnect.com/flex


0.2mm / 0.3mm PITCH SOLUTION

- LC Display to Board and Board to Board connections
- Consumer, Data and Medical
- Mobile Phone, Mobile Equipment, Optical Drive

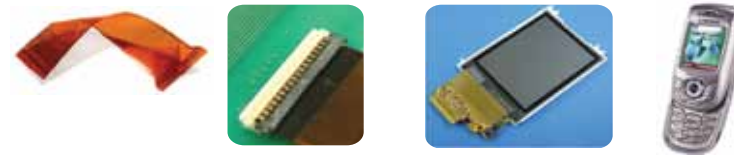

0.5mm PITCH SOLUTION

- Display & Board to Board connections
- Consumer, Car Multimedia, I&I, Data and Comm
- Mobile equipment, IP phone, POS, Car audio & Navigation

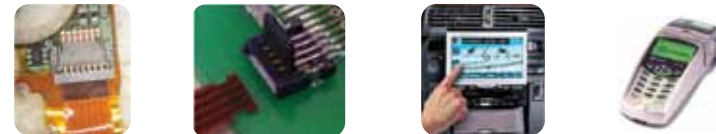

1.0mm / 1.25mm / 2.54mm PITCH SOLUTION

- Cable to Board and Board to Board connections
- Car Multimedia, I&I, and Data
- Car audio, Drive, POS, Printer



FLEX CONNECTOR SOLUTIONS INFORMATION

FCI's Highly reliable Gas Tight High pressure (GTH) contact with a wide variation of Zero Insertion Force (ZIF) and non-ZIF options for FFC & FPC connector solutions.

FCI provides a robust design providing high cable retention forces. The flipping actuator 0.5mm pitch type facilitates the secure cable assembly with click actuation for automotive multimedia and I&I applications.

Pitch	Family Name	Height (mm)	Contact Location	ZIF / LIF	Positions Available
0.2mm	XL-D	0,9	Bottom	ZIF (FF)	29
	0.3mm	YLL-D	0,9	Bottom	ZIF (FF)
0.5mm	YLL-U	0,9	Top	Non-ZIF	15,21,23,25,27,31,33,35,37,39,41
	OPU-D	2,0	Bottom	ZIF (SL)	38,40,45,50,55,57
	OPU-U	2,0	Top	ZIF (SL)	32,34,36,40,45,50,55,57
	SFVE	1,2	Top	ZIF (FF)	18,20,24,28,30
	SFVL-D	0,9	Bottom	ZIF (BF)	4,5,6,7,8,9,12,13
	SFVL-U	0,9	Top	ZIF (BF)	4,5,6,8
	SFV-R	1,8	Top, Bottom	ZIF (SL)	4-35
	SFV-S	4,1	N/A	ZIF (SL)	8,12,16,20,21,22,23,24,25,26,30,32,33
	VHC	2,0	Bottom	ZIF (FF)	35,50,60,70
	VLK	1,3	Bottom	ZIF (FF)	35,45,60
	VLH	1,3	Bottom	ZIF	40,45,50
	VLL	1,2	Bottom	ZIF (BF)	8,10,11,12,14,15,16,18,20,22,24,26,28,30
	VLP	0,7	Bottom	ZIF (BF)	4,8,10
	1.0mm	HFW-R	1,9	Top, Bottom	Non-ZIF
HFW-S		5,3	N/A	Non-ZIF	4-30,32
HLW-R		3,9	Top	Non-ZIF	4-32
HLW-S		5,9	N/A	Non-ZIF	4-32
SFW-R		2,7	Top, Bottom	ZIF (SL)	4-30
SFW-S		5,3	N/A	ZIF (SL)	4,5,6,8,10,11,12,14,15,16,17,18,20,22,23,24,26,28,30
SLW-R		4,0	Bottom	ZIF (SL)	4-30
SLW-S		5,5	N/A	ZIF (SL)	4-30
1.25mm	HLEM-R	4.9/6.0	Side Entry	Non-ZIF	4-40
	HLEM-S		Top Entry	Non-ZIF	
2.54mm	Clincher	Standard receptacle			2-32
	Clincher	Receptacle with keying latch			2-16
	Clincher	Receptacle with keying feature			6-34
	Clincher	Receptacle with keying & active latch			6-34
	Clincher	Standard plug			3-14
	Duflex				

KEY:

ZIF (SL): Slider action
 ZIF (FF): Front side flip
 ZIF (BF): Back side flip