


TRANSPORTATION

GENERAL DESCRIPTION

FCI Smartag inlays are widely used in various applications, including low cost transport ticketing, commonly associated with single use applications. Our inlays are ISO 14443 compliant. All FCI Smartag inlays are 100% tested prior to delivery.

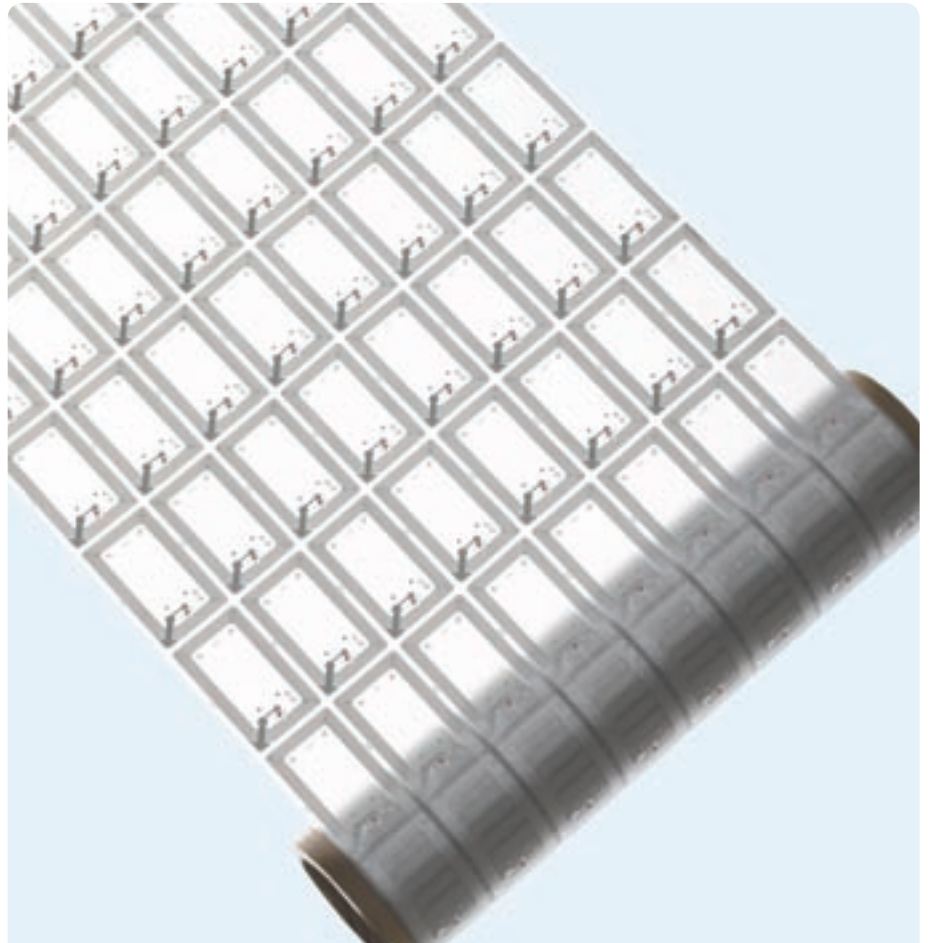

Contact us : +65 6451 4875

smartag.info@fci.com

www.fci.com

| | |
|--------------------------------------|---|
| ▀ AVAILABLE CHIP | NXP Mifare, STM SR series, Infineon SLE 66 CL xxx/Rxx |
| ▀ INLAY SIZES | 76 x 43 mm |
| ▀ INLAY MATERIAL | AL etched; PET Substrate |
| ▀ DELIVERY FORMAT | Reel (defective units marked) |
| ▀ OUTER/ INNER REEL DIMENSION | 300 mm (12") / 76 mm (3") |
| ▀ QTY/ REEL | 8000 pcs |
| ▀ STORAGE LIFE | Desiccated condition / +10 to +35°C, 3 Years |
| ▀ OPERATING TEMPERATURE | -25 to + 50°C |
| ▀ MOQ (MINIMUM ORDER QTY) | 1 reel |